


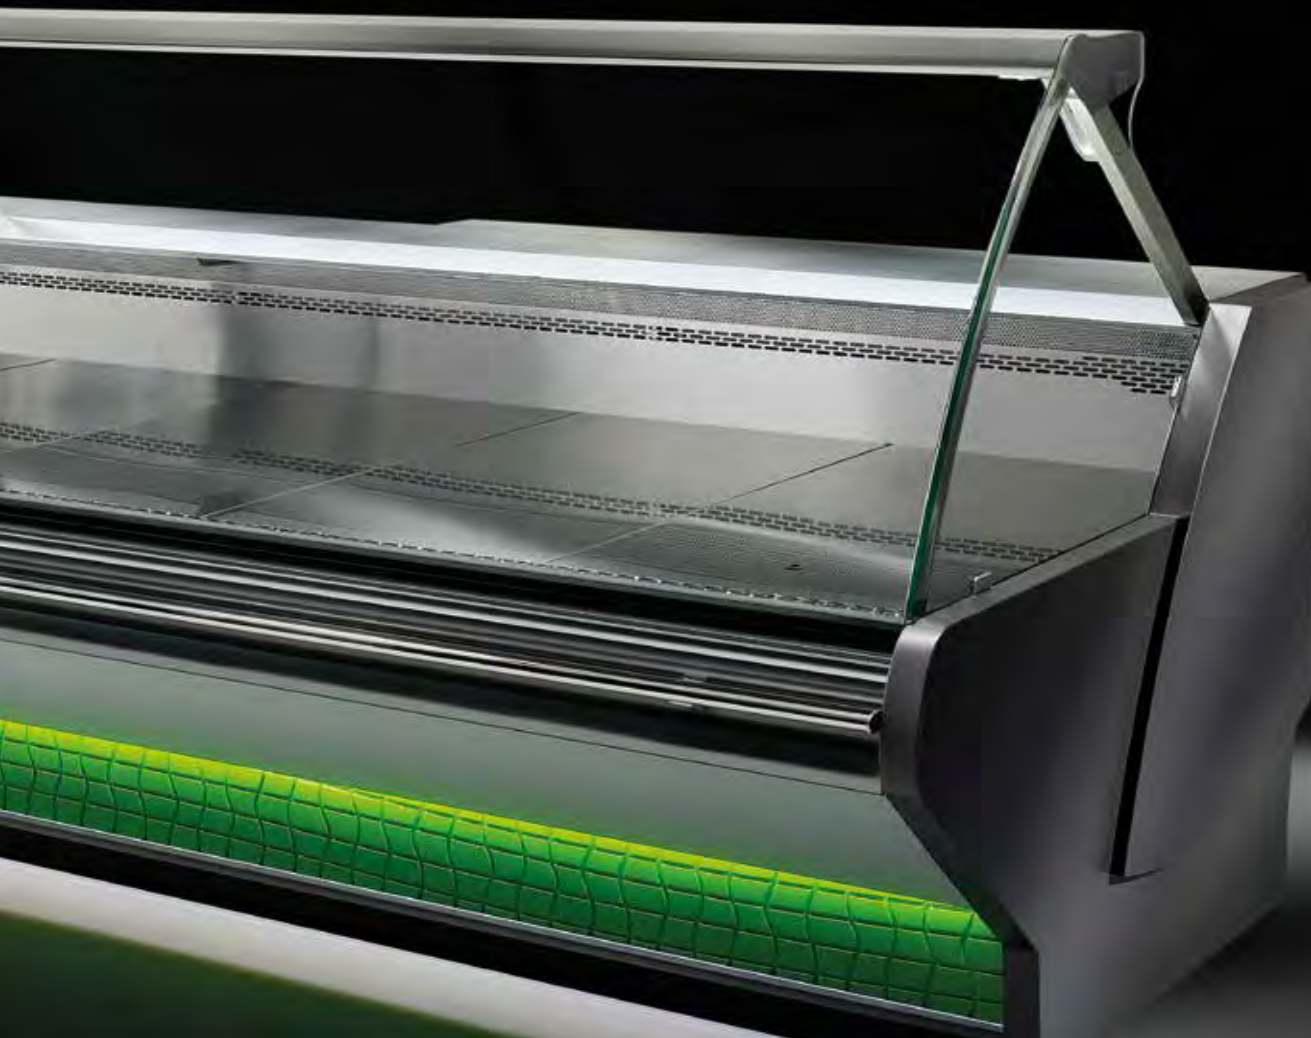

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35


Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132


Киргизия +996(312)96-26-47

<https://criocabin.nt-rt.ru/> || cnv@nt-rt.ru

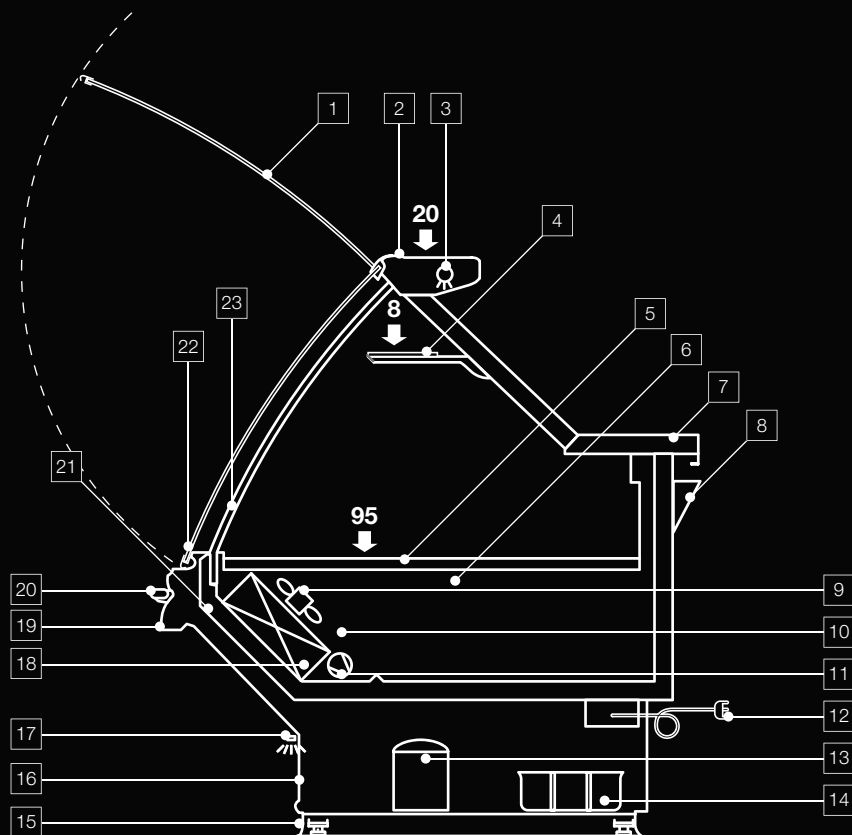

CABINET FEATURES



1. Lift-up glasses.
2. Top shelf in painted aluminium.
3. Lighting: fluorescent tube with Osram Warm White 830 light. (p)
4. Intermediate glass shelf. *
5. AISI 304 stainless steel display surface. (p)
6. AISI 304 stainless steel unit interior.
7. Working board in stainless steel scratchproof.
8. Paper holder.
9. Ventilated refrigeration with potentiometer to adjust air flow rate.
10. Ventilated defrosting with compressor block.
11. R404a thermostatic refrigeration valve. (p)
12. Cabinet without refrigeration unit: binding clamp.
13. Cabinet with refrigeration unit: control panel.
14. Condensing water collection tank. *
15. Front and rear bumper skirting.
16. Customizable front panel - see colour chart. (p)
17. Front LED lighting. *
18. Evaporator treated with cataphoresis (ER300 excluded).
19. Front frame in aluminium A82 Dark Gray Met with painted finishing. (p)
20. Brite stainless steel bumper pipe. *
21. Multiplexable.
22. Anti-fogging front ventilation.
23. Spherical corners 90°-45° internal and external.

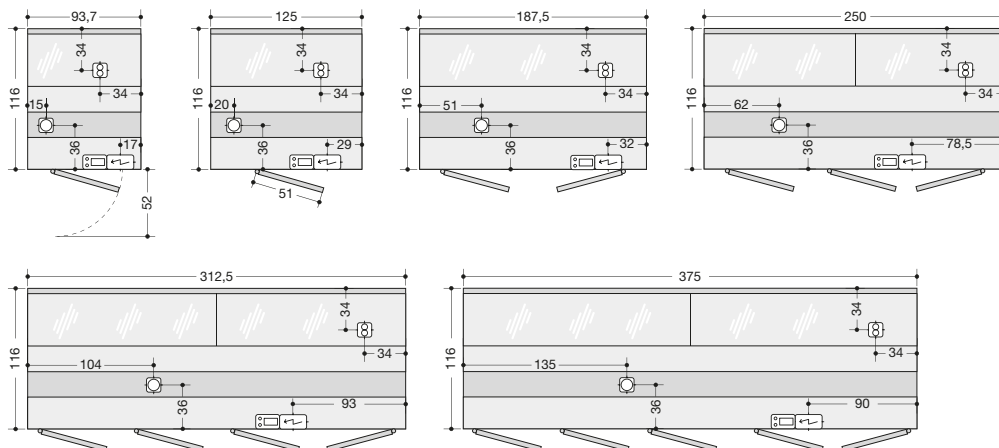

Average refrigerating power (evaporation -10 °C):
300 W per linear meter

L	93,7	125	187,5	250	312,5	375
❄️	315	425	615	815	1010	1200
🌀	ø 40	ø 40	ø 40	ø 40	ø 40	ø 40
🔌	ø 6-12	ø 6-12	ø 6-12	ø 6-12	ø 6-12	ø 6-12
📦	102	139	213	286	360	432
🔺	0,84	1,13	1,7	2,25	2,81	3,38
📏	1	1	1	2	2	2
📏	1	1	1	2	2	3
⚡	230-1-50	230-1-50	230-1-50	230-1-50	230-1-50	230-1-50
📺	430W	430W	500W	590W	950W	950W
🌸	60W	60W	120W	120W	180W	180W
💡	1 x 18W (60)	1 x 30W (90)	1 x 58W (150)	1 x 30W (90) 1 x 36W (120)	1 x 36W (120) 1 x 58W (150)	1 x 30W (90) 2 x 36W (120)
📺	508	522	678	778	1224	1234
📺 *	225W	300W	450W	600W	750W	900W
📺 *	11W	14W	21W	28W	34W	42W

99

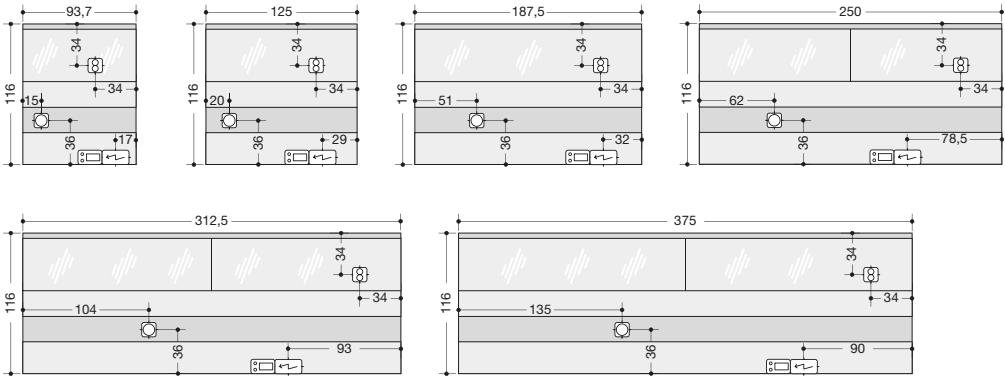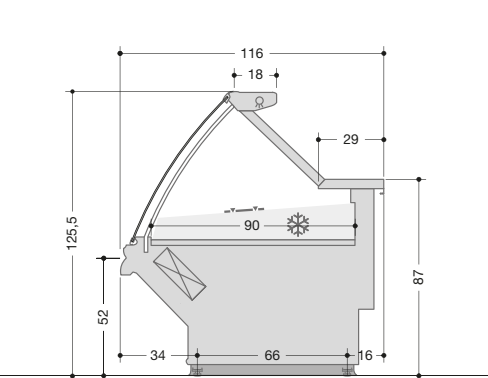

ERGO ER200







Refrigerated, without refrigerator compartments.

Operating temperature: 3°+5°
Climatic class (EN441): 3
Temperature class: M2
Type of refrigeration: ventilated
Defrosting: compressor stop (resistor *)
Display surface: 0,91 m² per linear meter
Evaporator: cataphoresis treated
Lighting: fluorescent tube with white light (colour 830)
Reactor: mechanical
Control: electronic
Average refrigerating power (evaporation -10 °C): 300 W per linear meter

L	93,7	125	187,5	250	312,5	375
	315	425	615	815	1010	1200
	ø 40	ø 40	ø 40	ø 40	ø 40	ø 40
	ø 6-12	ø 6-12	ø 6-12	ø 6-12	ø 6-12	ø 6-12
	0,84	1,13	1,7	2,25	2,81	3,38
	1	1	1	2	2	2
	1	1	1	2	2	3
	230-1-50	230-1-50	230-1-50	230-1-50	230-1-50	230-1-50
	430W	430W	500W	590W	950W	950W
	60W	60W	120W	120W	180W	180W
	1 x 18W (60)	1 x 30W (90)	1 x 58W (150)	1 x 30W (90) 1 x 36W (120)	1 x 36W (120) 1 x 58W (150)	1 x 30W (90) 2 x 36W (120)
	508	522	678	778	1224	1234
	225W	300W	450W	600W	750W	900W
	11W	14W	21W	28W	34W	42W

L = Length without endwalls

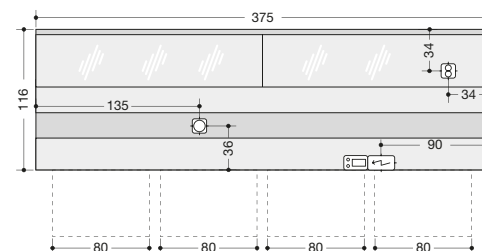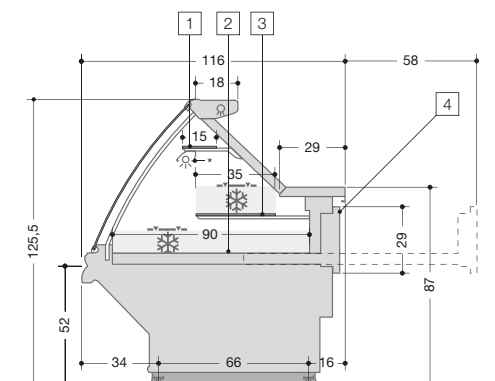

ERGO ER300



Pastry.

1. Top shelf without refrigeration - shelf lighting. *
2. Cream-colour painted interior.
3. Refrigerated shelf.
4. Removable refrigeration drawer.

Operating temperature: 4°/+6°

Climatic class (EN441): 3

Temperature class: H1

Type of refrigeration: ventilated

Defrosting: compressor stop (resistor *)

Display surface: 1,25 m² per linear meter

Evaporator: pre-painted

Lighting: fluorescent tube with white light (colour 830)





Reactor: mechanical

Control: electronic

Average refrigerating power (evaporation -10 °C):
300 W per linear meter

L	125	187,5	375
	425	615	1200
	ø 40	ø 40	ø 40
	ø 6-12	ø 6-12	ø 6-12
	1,15	2	4,2
	1	1	2
	230-1-50	230-1-50	230-1-50
	430W	500W	950W
	60W	120W	180W
	1 x 30W (90)	1 x 58W (150)	1 x 30W (90) 2 x 36W (120)
	300W	450W	900W
	520	680	1230
*	1 x 28W (117)	2 x 21W (87)	3 x 28W (117)
*	14W	21W	42W

L = Length without endwalls

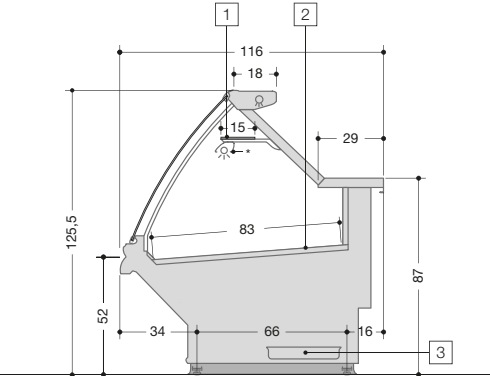

ERGO ER310




Bread.

- 1. Top shelf without refrigeration - shelf lighting. *
- 2. Display surface made of bleached oak laminate.
- 3. Tray for collecting breadcrumbs.

Display surface: 0,83 m² per linear meter
Lighting: fluorescent tube with white light (colour 830)
Reactor: mechanical

L	93,7	125	187,5
	0,78	1	1,55
	1	1	1
	1	1	1
	230-1-50	230-1-50	230-1-50
	1 x 18W (60)	1 x 30W (90)	1 x 58W (150)
	18	30	58
	1 x 21W (87)	1 x 28W (117)	2 x 21W (87)
	11W	14W	21W

L = Length without endwalls

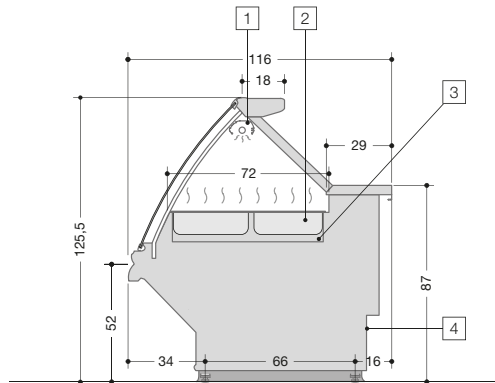

ERGO ER400



Hot, Bain-Marie.








1. Heating lamp.
2. Food tray heating in bain-marie.
3. Electronic floater for water filling.
4. Control panel with power control for hot section and heating lamp.

Operating temperature: 70°

Display surface: gastronorm trays h=100 mm

Lighting: infrared lamp

Control: electromechanical

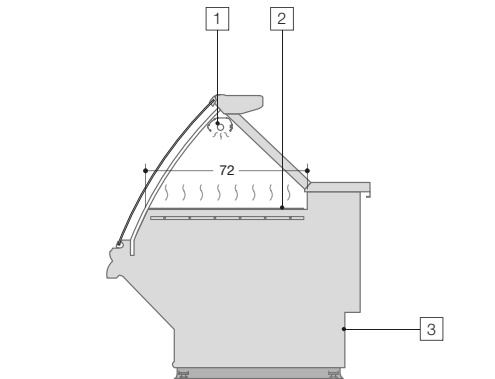

ERGO ER410



Dry Hot.




1. Heating lamp.
2. Heated plate.
3. Control panel with power control for hot section and heating lamp.

Operating temperature: 70°

Display surface: 0,72 m² per linear meter

Lighting: infrared lamp

Control: electromechanical



* Optional

L	125	187,5	250
	ø 40	ø 40	ø 40
	ø 3/4 inches - female	ø 3/4 inches - female	ø 3/4 inches - female
	1	1	2
	1	1	2
	400-3-50	400-3-50	400-3-50
	4000W	4000W	8000W
	1 x 2000W	1 x 2000W	2 x 2000W
	6000	6000	12000


L = Length without endwalls

Dimensions and structure of gastronorm trays:

1/2	1/3	2/3
32,5 x 26,5	32,5 x 17,6	32,5 x 35,4
h 10	h 10	h 10

L	125	187,5	250
	1	1	2
	1	1	2
	400-3-50	400-3-50	400-3-50
	1320W	1880W	2640W
	1 x 2000W	1 x 2000W	2 x 2000W
	3320	3880	6640

L = Length without endwalls

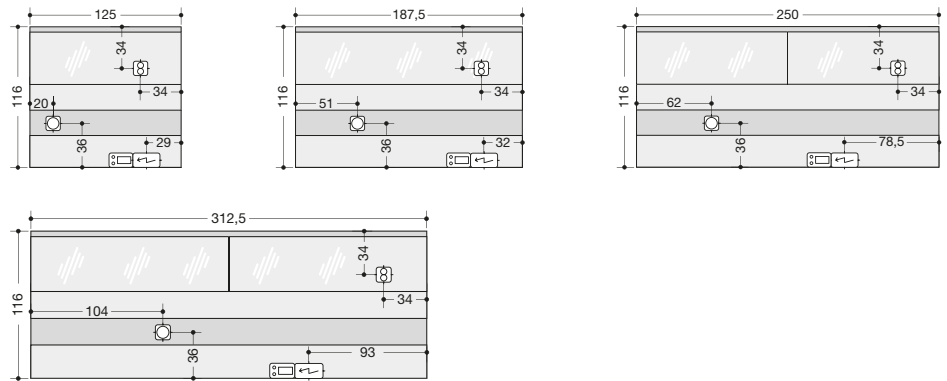


1. Refrigerated deck.
2. Static evaporator handled with anti-corrosion cataphoresis.

Operating temperature: 3°/+5°
Climatic class (EN441): 3
Temperature class: M2
Type of refrigeration: static
Defrosting: compressor stop (resistor *)
Display surface: 0,81 m ² per linear meter
Evaporator: cataphoresis treated
Lighting: fluorescent tube with white light (colour 830)
Reactor: mechanical
Control: electronic
Average refrigerating power (evaporation -10 °C): 300 W per linear meter

L	125	187,5	250	312,5
	425	615	815	1010
	ø 40	ø 40	ø 40	ø 40
	ø 6-12	ø 6-12	ø 6-12	ø 6-12
	1	1,51	2	2,53
	1	1	2	2
	1	1	2	2
	230-1-50	230-1-50	230-1-50	230-1-50
	430W	500W	590W	950W
	1 x 30W (90)	1 x 58W (150)	1 x 30W (90) 1 x 36W (120)	1 x 36W (120) 1 x 58W (150)
	20W	40W	40W	60W
	480	598	696	1104
 *	300W	450W	600W	750W
 *	14W	21W	28W	34W

* Optional

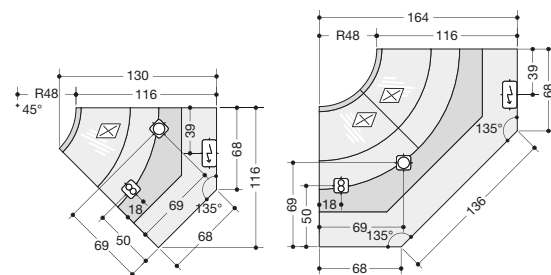

Length without endwalls: 62,5 - 93,7

Defrosting: compressor stop (resistor *)

Average refrigerating power (evaporation -10 °C):
300 W per linear meter

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Киргизия +996(312)96-26-47